


Double Sliding Door Cabinet to Cabinet Ordering Guide (DSD6000)

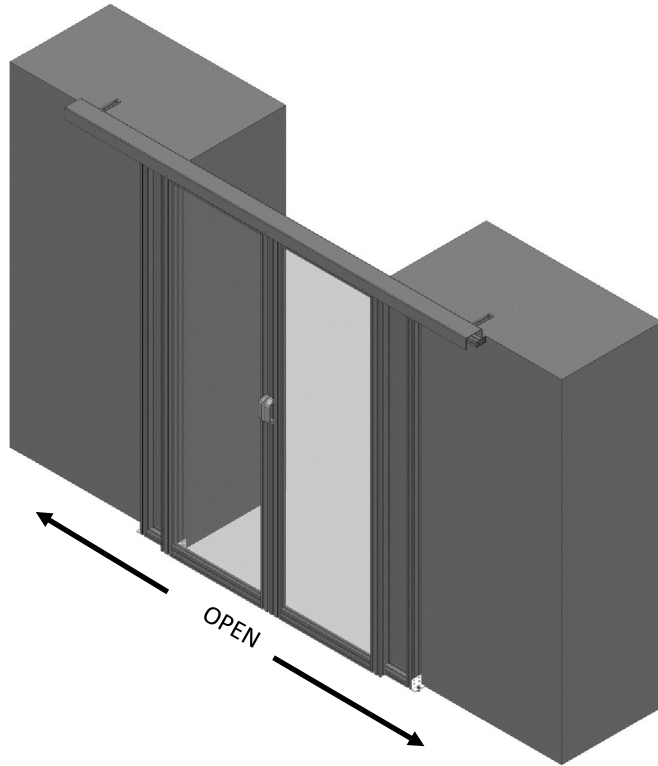

- Technical Specifications:**
- Fits aisle opening: 42-90"
 - Three aisle widths up to 48", 74" and 90"
 - Pass through opening with doors opened: 42"
 - Rough frame opening width: 48"
 - Door and frame footprint: (3.2" x 60") (3.2 x 80") (3.2 x 96")
 - Only compatible with between cabinet aisles
 - Standard clear or black anodize finish or white powder paint
 - Must be secured to the floor
 - Standard hold open feature
 - Standard auto close feature
 - Doors are made from aircraft grade extruded aluminum frames and clear polycarbonate panels which meet the 2013 NFPA standard for smoke (450 or lower) and flame spread (50 or lower) ASTM E-84 and UL723

- Custom Solutions:**
- Custom powder paint options available
 - Custom height and width doors available
 - Between wall and cabinet solution
 - Free standing solution

- Choosing the right mounting kit insures receiving the right small parts in the installation kit.
- MOUNTING PLATE OPTIONS**
- 2C** 2 ea. flat slotted mounting plate (cabinet to cabinet)
- 1CW** 1 ea. flat slotted mounting plate 1 ea. angle slotted mounting plate (cabinet to wall)
- NC** no mounting plates included

Note: 42" to 48" aisle widths take 6" side lites, 49" to 74" aisle widths take 16" side lites and 75" to 90" aisle widths take 24" side lites.

Example

DOUBLE SLIDING DOOR (DSD6000)	CHOOSE OPENING SIZE 54", 74" OR 90"	CABINET HEIGHT ROUND UP TO NEAREST 1/16"	CHOOSE TOP MOUNTING PLATE	CHOOSE CLEAR OR BLACK ANODIZE FINISH OR WHITE PAINT
DSD6000	74	88-5/8"	2C	BLACK

