



801.494.2098

www.WindChillEngineering.com


Double Pivot Door

Standard Features

- Ordered to size for precise fit
- No threshold design
- Double acting closer with adjustable tension
- Sturdy aluminum frame
- Doors hold open at 85°

Door Options

- Clear/Black Anodize
- Bottom Kick Plate
- Aluminum Handle
- Free Standing
- Custom Colors
- Other Customizations

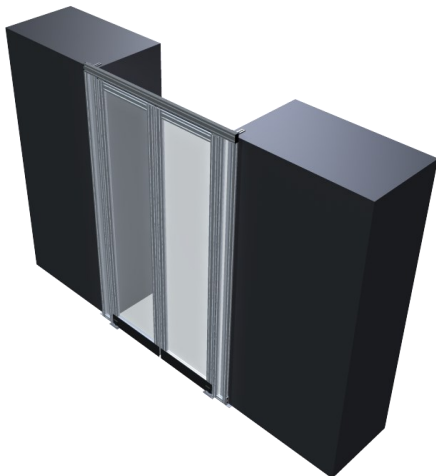


Technical Data: Double Pivot Door

Standard Specifications

Size and Finish		Panel Options	Test	Result
Total Height *	Up to 98"	3 mm Polycarbonate	ASTM E-84	Class B
Total Width *	Up to 96"		ASTM D635	CC1
Pass Through Width	39 ⁷ / ₈ "		ASTM D2843	<75
Footprint	1 ³ / ₁₆ "	4.5 mm Polycarbonate	UL 94	V-0
Door & Frame			ASTM D635	CC1
			ASTM D2843	Passed
Material	6560 T-6 Temper Aluminum	3 mm Clear PVC	FM 4910	Passed
Tensile Strength	30,000 psi		UL 94	V-0
			ASTM E-84	Class A

* Specify size when ordering

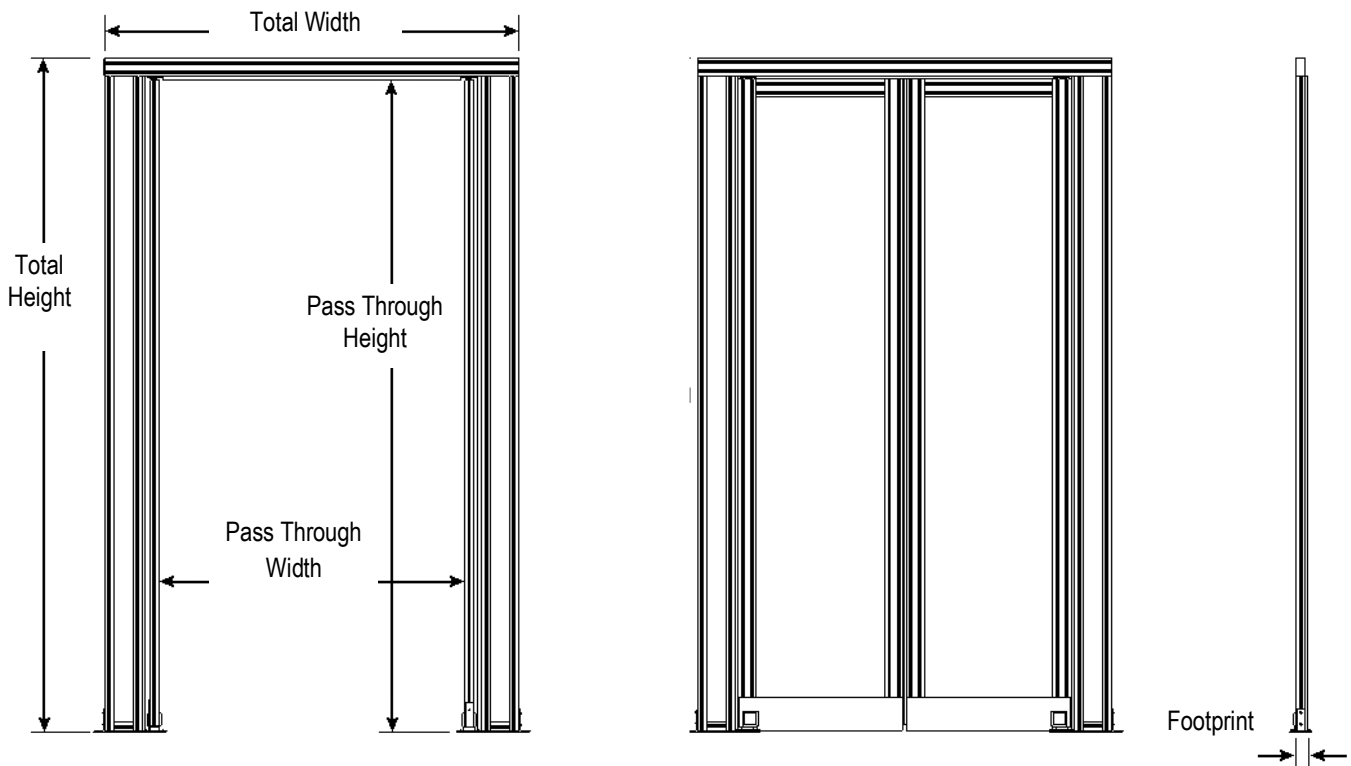

Measurements Needed

1. Door Height - Measurement from ground to top of door. Typically top of door will be sized 1.1875" taller than the cabinets for integration with overhead containment.
2. Door Width - Measurement from frame edge to frame edge. Make frame width at least 2.5" wider than aisle width to ensure aisle is fully contained.