



Manual Closing Single Sliding Door

Standard Features

- Custom width for precise fit to most any opening
- No threshold design
- Sturdy aluminum frame
- Door catch holds door closed
- Fire rated clear paneling
- Tight tolerances

Custom Options

- Digital lock
- Custom colors
- Aluminum handles
- Custom logo
- Corrugated paneling

***Custom
designed and
built specific
to the
constraints
of the
installation***



Contact Info


801.494.2098

435 W. Airport Rd Unit A5
Heber City, UT 84032

info@theWindChill.com
www.WindChillEngineering.com

Standard Specifications *

| Size and Finish | | Door & Frame | |
|---------------------|---------------------------------------|---|--------------------------|
| Fits Aisle openings | 38" to 90" | Material | 6560 T-6 Temper Aluminum |
| Total Height | Up to 101 1/2" | Tensile Strength | 30,000 psi |
| Pass Through Height | Up to 98" | Lexan (High Optic Polycarbonate) | |
| Total Width | Up to 80" | Material | Polycarbonate |
| Pass Through Width | 38 5/8" | Thickness | 4.5mm |
| Profile Width | 3 11/16" | Self-ignition Temperature: | 650°F (ASTM D1929) |
| Standard Finish | Satin Anodize (Clear) | Horizontal Burn Rate | ASTM D635 |
| Upgrade Finish | Custom Anodize and Powder Coat Colors | Smoke Density | ASTM D2843 |
| | | Flammability | UL 94 |

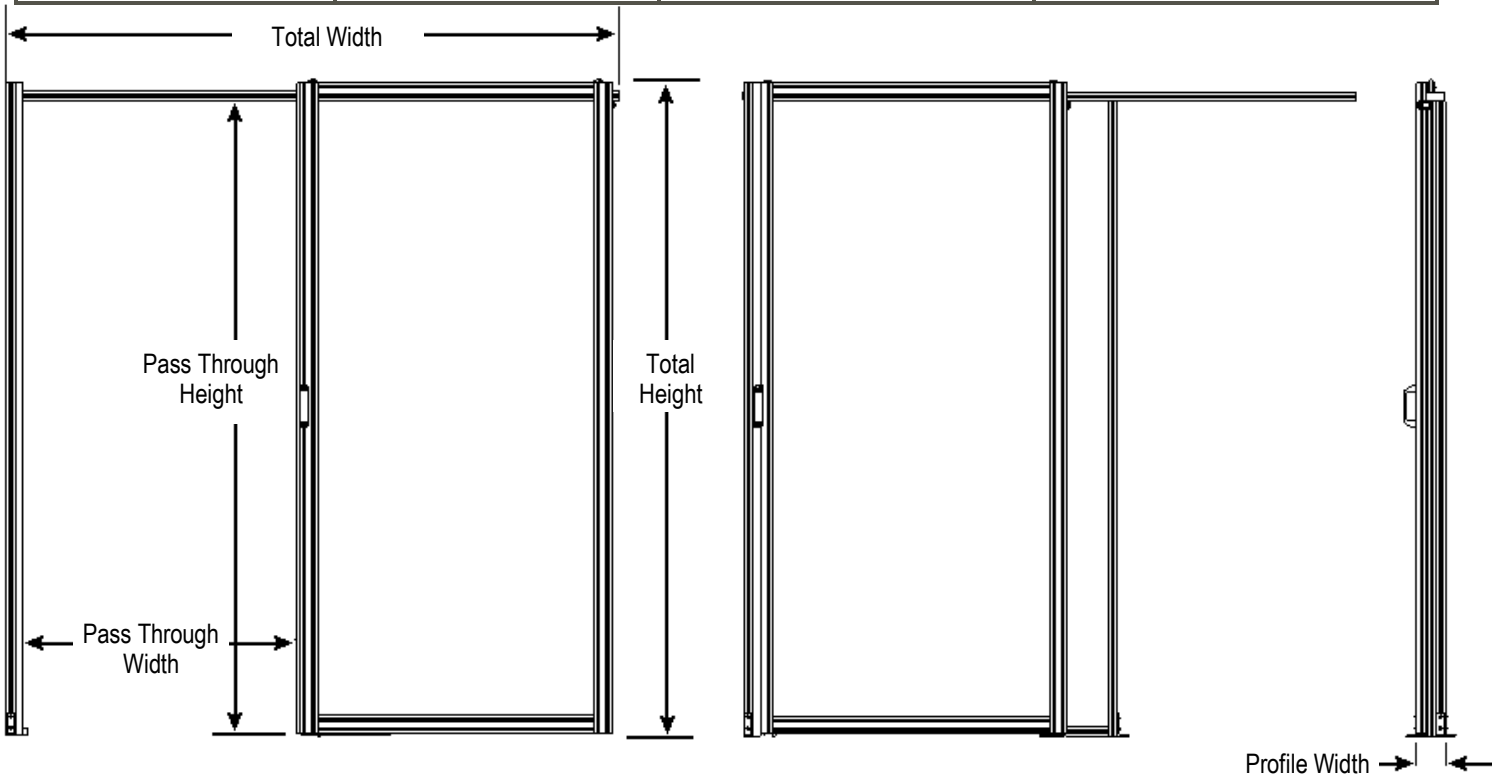

Measuring for Rigid Containment

Measurements Needed for Rigid Doors

1. Aisle width (Distance from cabinet frame to cabinet frame or cabinet frame to wall)
2. Cabinet Height (finished cabinet height after being raised on levelers)

Typical Door Sizing

- Doors are typically built 1 3/16" taller than the cabinets, which allow the door to cap a hot or cold aisle ceiling system.
- Door side panels typically extend 2" to 8" past the cabinet opening (ex: For 48" aisle, the door width including side panels will be 56").
- Custom sized doors available upon request.